

Technical Data Sheet




Radiant Heating & Cooling Panels


Floor Panel 4GF2C

4 Guillotined Edges, 2 Coverplates


Data Sheet 8-2

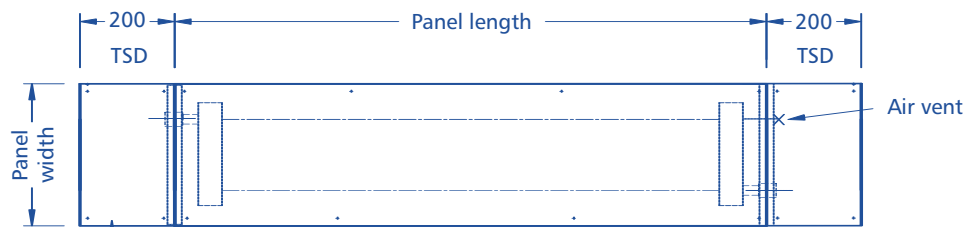

Plan

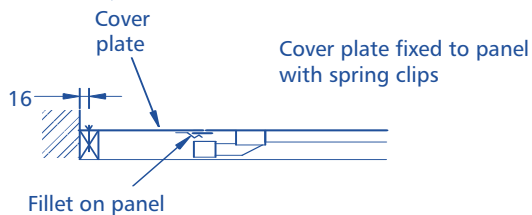

Cover Plate Detail

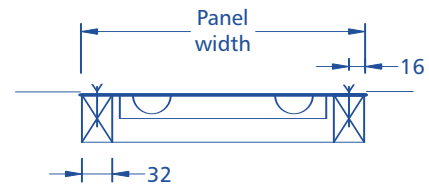

Section

NOTES

- Panel faceplate to be 2mm thick stainless steel, matt polished.
- Timber grounds by others.
- Panels insulated with 50mm glass fibre class 'o' backed mattress.
- Panels drilled at approximately 300mm centres for fixing with No.7 countersunk stainless steel wood screws.
- Connections are 15mm, 20mm or 25mm BSP sockets.
- All edges guillotined.
- Cover plate manufactured to site dimensions (TSD) after panels are fixed.
- Panels tested to 700 kPa at works.
- Panel mass is approximately 40 kg/m².
- Air vents concealed beneath cover plate.

COMYN CHING & CO. (SOLRAY) LTD

SOLRAY WORKS, MANILLA STREET, DOCKLANDS, LONDON E14 8LG

TEL: 020 7987 8787 FAX: 020 7987 9898

WWW.SOLRAY.CO.UK E-MAIL: SALES@SOLRAY.CO.UK