

Technical Data Sheet




Radiant Heating & Cooling Panels

Solray Modular Trident

ELECTRIC

Section, Aluminium Faceplate

Data Sheet 5-4

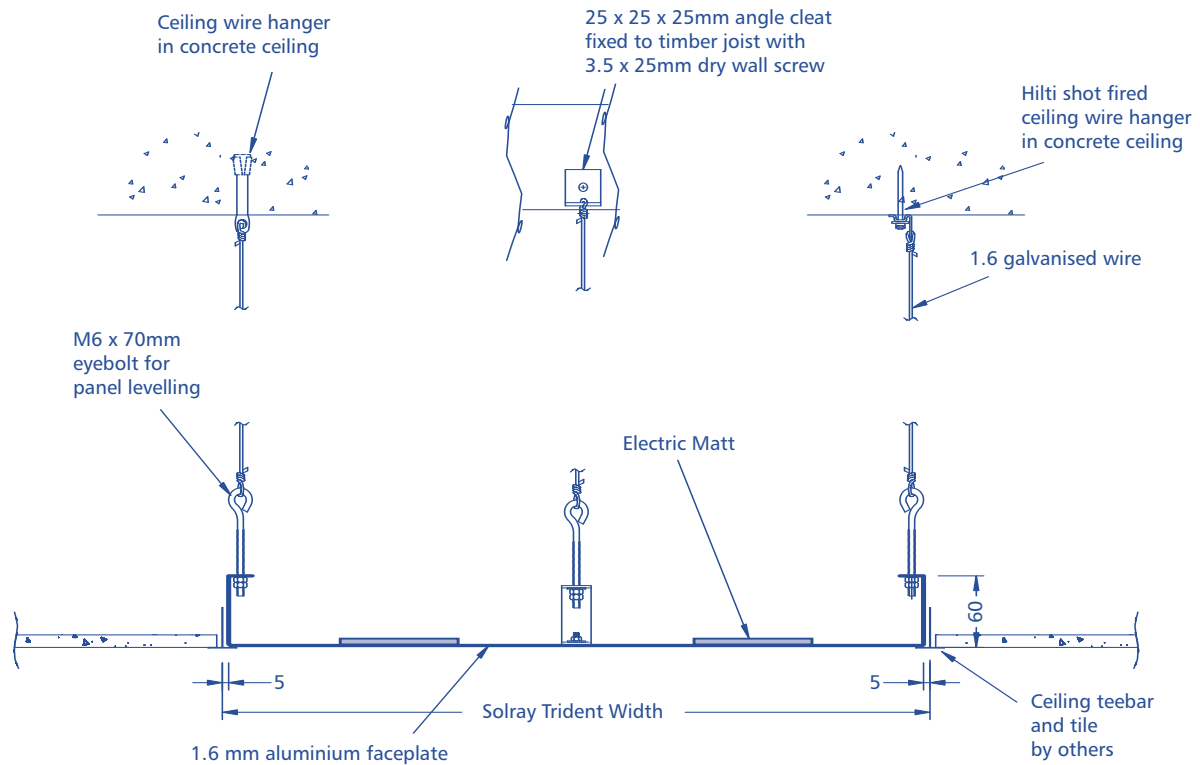

Typical Trident Detail

Type	Length /mm	Width /mm	Weight /Kg	Output/W
SMTe60	590	590	2.88	178
SMTe1200	1190	590	5.76	356
SMTe1800	1790	590	8.64	534
SMTe2400	2390	590	11.52	712
SMTe3000	2990	590	14.40	891

Outputs are based on using 240v supply, with a face temperature of 70°C.
Panels are insulated with 50mm glass fibre foil-backed mattress.

COMYN CHING & CO. (SOLRAY) LTD

SOLRAY WORKS, MANILLA STREET, DOCKLANDS, LONDON E14 8LG

TEL: 020 7987 8787 FAX: 020 7987 9898

WWW.SOLRAY.CO.UK E-MAIL: SALES@SOLRAY.CO.UK