


Technical Data Sheet

Solray Linear Trident FH Electric SFH3540:e

Free Hanging

Data Sheet 9-6

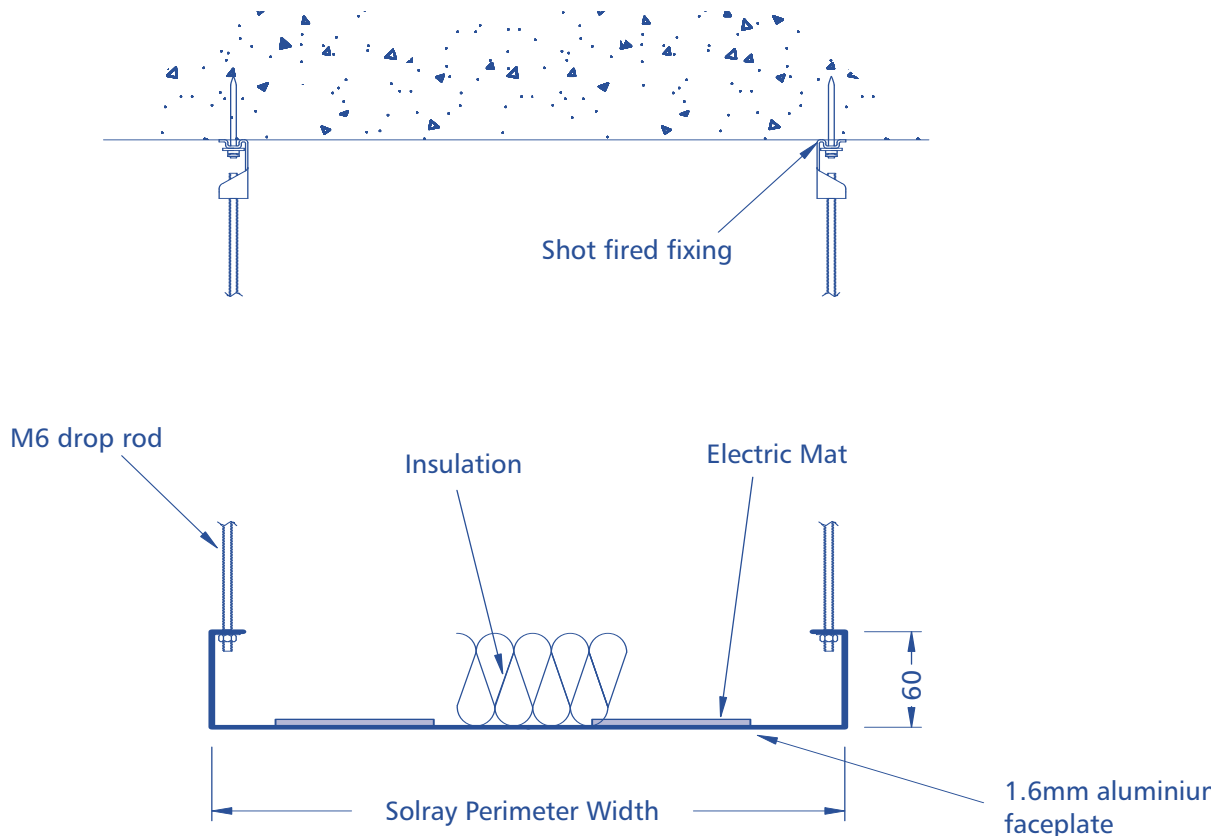

Typical Section Detail

NOTES

Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour.

Panels insulated with 50mm glass fibre class 'o' backed mattress.

Panels tested at works for earth continuity and insulation integrity.

Electric supply = 230v single phase as standard.

Emissions based on 500W/m². Others available if required.

Size of panel to suit emission required.