

Technical Data Sheet




Radiant Heating & Cooling Panels

Solray Linear Trident Electric SLT3540:e

Ceiling Mounted

Data Sheet 9-2

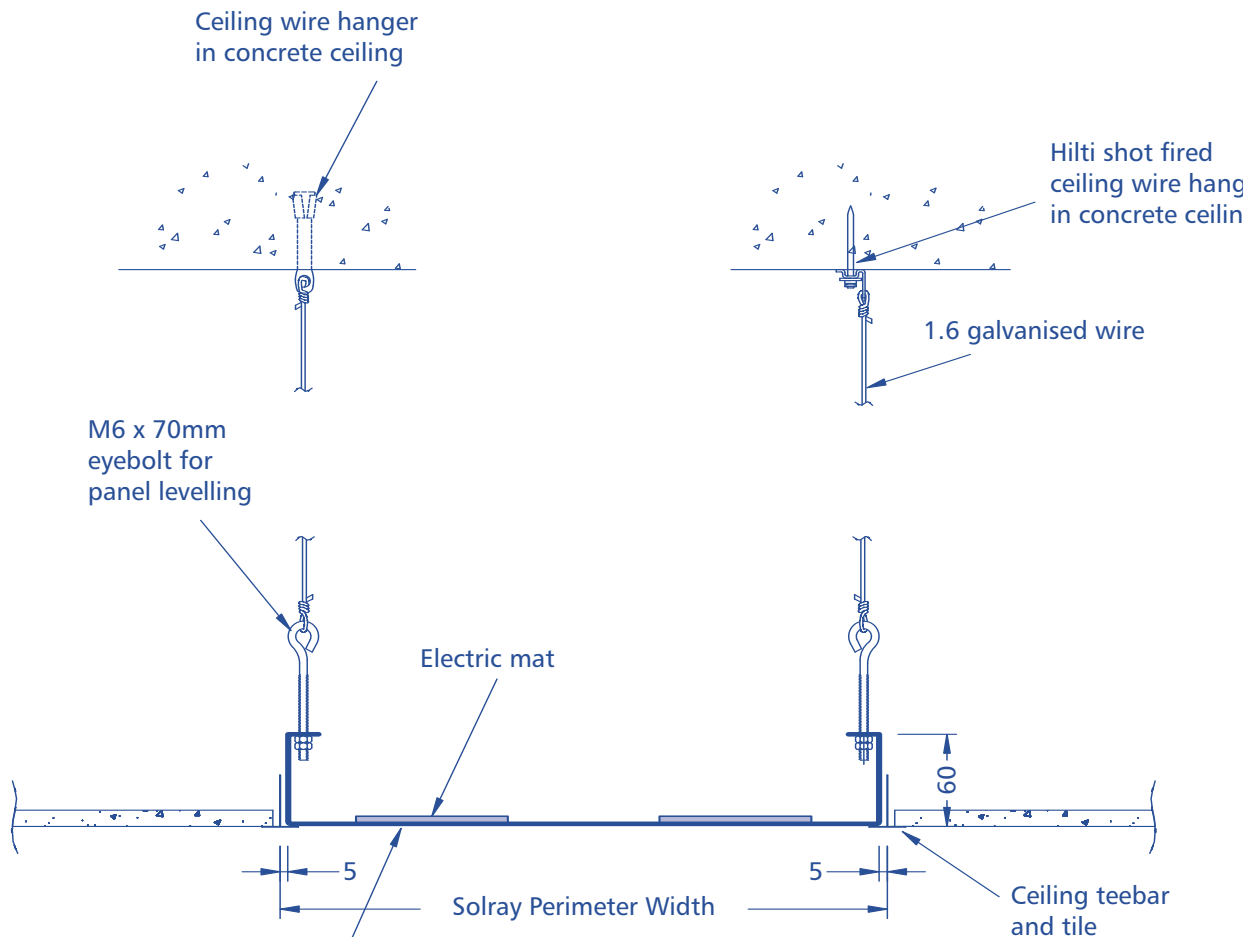

Typical Section Detail

NOTES

Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour.

Panels insulated with 50mm fibre glass class 'o' backed mattress.

Panels tested at works for earth continuity and insulation integrity.

Electric supply=230v single phase. As standard

Emissions based on 500W/m². Others available if required.

Size of panel to suit emission required.

COMYN CHING & CO. (SOLRAY) LTD

SOLRAY WORKS, MANILLA STREET, DOCKLANDS, LONDON E14 8LG

TEL: 020 7987 8787 FAX: 020 7987 9898

WWW.SOLRAY.CO.UK E-MAIL: SALES@SOLRAY.CO.UK