

Technical Data Sheet





Radiant Heating & Cooling Panels

Solray Wall Panel 2RW1C:S

2 Returned Edges, 1 Cover Plate

Wall Mounted, Steel Faceplate


Data Sheet 6-5

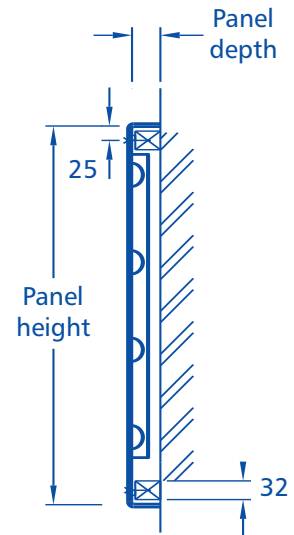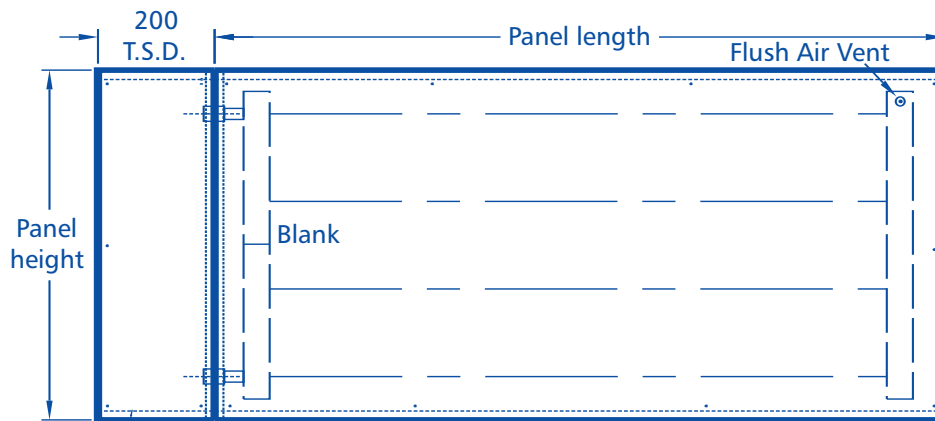

Cover plate fixed to panel with M4 countersunk set screws

Front Elevation

Section

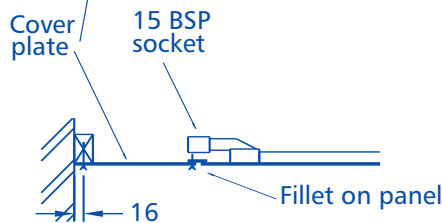

Cover Plate Detail

NOTES

All panels are constructed from 2mm mild steel.

Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour.

Timber grounds by others.

Panels insulated with 50mm glass fibre class 'o' backed mattress.

Panels drilled at approximately 600mm centres along returned edge for fixing with No.7 countersunk wood screws.

Connections are 15mm, 20mm or 25mm BSP sockets.

Top and bottom edges returned; side edges guillotined.

Cover plate manufactured to site dimensions (TSD) after panels are fixed.

Panels tested to 700 kPa at works.

Panel mass is approximately 40kg/m².

COMYN CHING & CO. (SOLRAY) LTD

SOLRAY WORKS, MANILLA STREET, DOCKLANDS, LONDON E14 8LG

TEL: 020 7987 8787 FAX: 020 7987 9898

WWW.SOLRAY.CO.UK E-MAIL: SALES@SOLRAY.CO.UK