


Technical Data Sheet

Solray Linear Trident

SLT3540 350mm - 400mm Wide

Ceiling Mounted, Aluminium Faceplate

Data Sheet 3-2

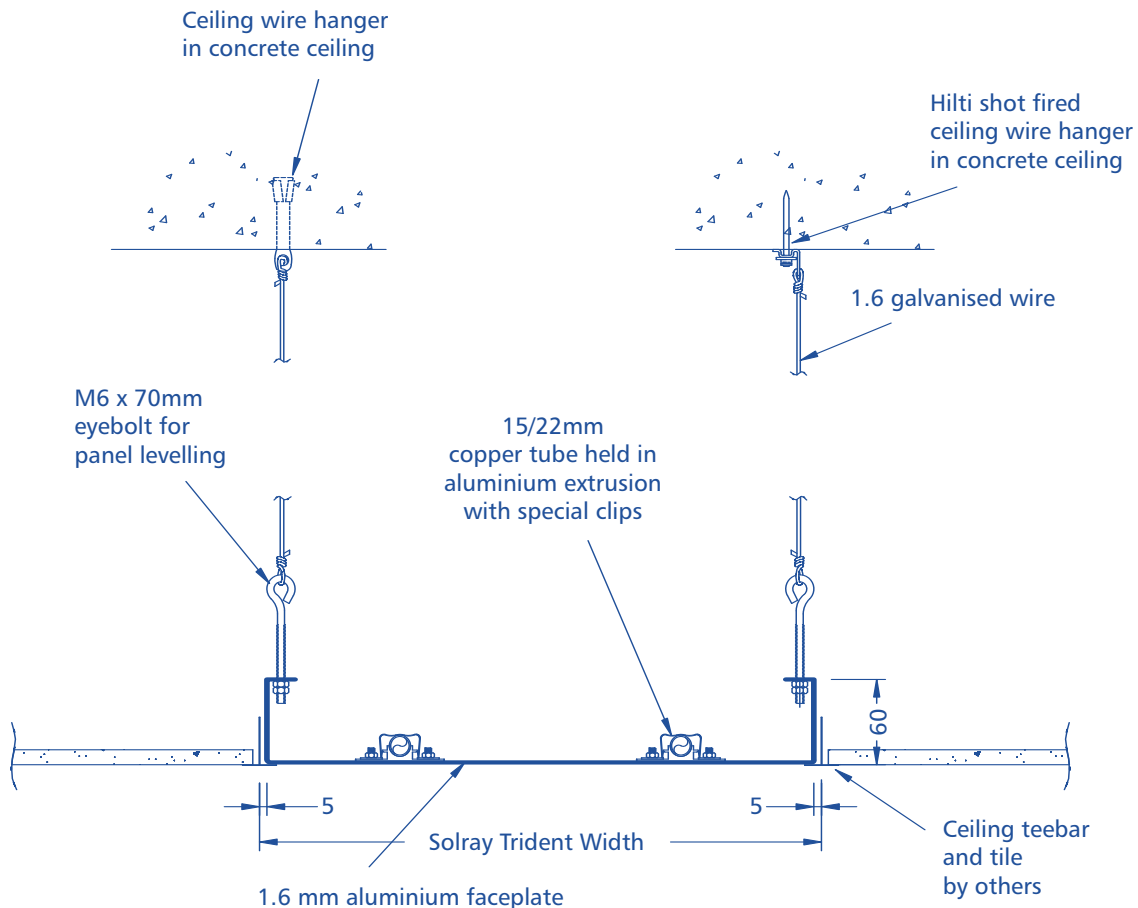

Typical Section Detail

NOTES

Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour.

Panels insulated with 50mm glass fibre class 'o' backed mattress.

Edges returned 60mm and 20mm.

Connections to be 75mm long copper tails.

Ceiling grid to be installed prior to panels.

Mass of 400mm Solray Trident is 6.7kg/m.