



Solray Anti Vandal/Ligature Steel Panels


Application: For mounting on ceilings or walls

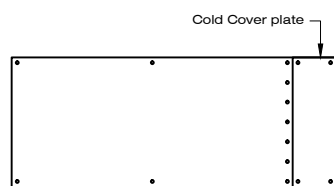


4 Rolled Edges

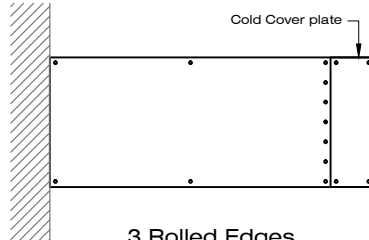


3 Rolled Edges
1 Guillotined Edge

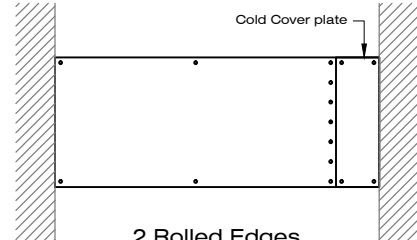


2 Rolled Edges
2 Guillotined Edges

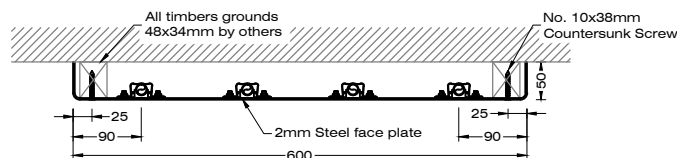


2 Rolled Side Panel Section Detail

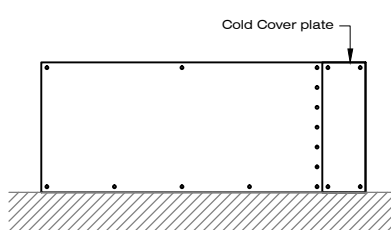


3 Rolled Edges
1 Guillotined Edge

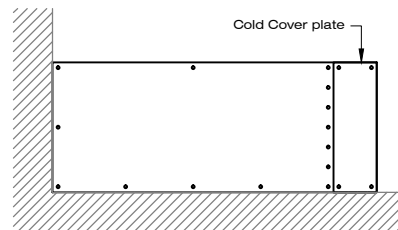

2 Rolled Edges
2 Guillotined Edges

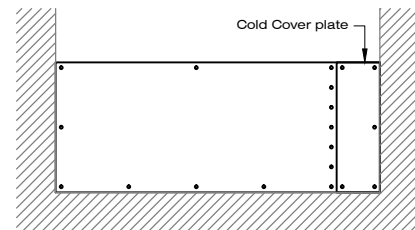

1 Rolled Edge
3 Guillotined Edges

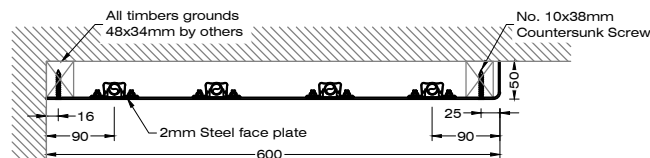

1 Rolled Side Panel Section Detail

- Timber grounds by others
- Guillotined Edges against walls with No.10 Wood screws at 300 centres Approx.
- Rolled edges Away form walls with No.10 Wood screws at 600 centres Approx.
- All edges to be sealed by others with anti pick mastic (not supplied)
- Panels insulated with 50mm foilback insulation (Class 'O')
- Connections are Copper tails.
- Panels tested to 700 kPa at works.
- Panel mass is approximately 25kg/m².
- 200mm cold cover plates for access to connections.
- Panels powder coated to RAL 9010 White as standard (any RAL colour available upon request).

T 01792 89 22 11

E sales@solray.co.uk

Comyn Ching & Co. (Solray) Ltd.

Phoenix Way, Garngoch Ind Est, Gorseinon, Swansea SA4 9WF.

www.solray.co.uk

Registered In England: 12454878