

Technical Data Sheet




Solray Perimeter ND4560

450mm - 600mm Wide

Surface Mounted, Aluminium Faceplate

Data Sheet 2-3

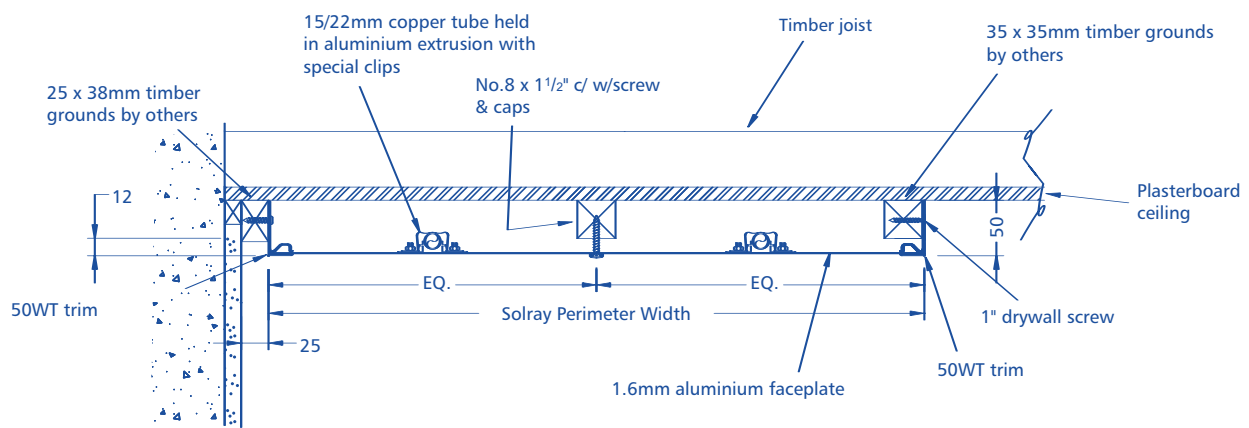

Typical Section Detail

NOTES

Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour.

Panels insulated with 50mm glass fibre class 'o' backed mattress.

Wall trims mill finished for final painting on site by others, fixed with No.7 x 1 1/4 inch countersunk wood screws. Connections to be 75mm long copper tails.

Timber grounds by others to be level, straight & securely fixed.

Perimeter face fixed with No. 8 wood screws and caps. Mass of 600mm Solray Perimeter is 7.5kg/m.

COMYN CHING & CO. (SOLRAY) LTD

SOLRAY WORKS, MANILLA STREET, DOCKLANDS, LONDON E14 8LG

TEL: 020 7987 8787 FAX: 020 7987 9898

WWW.SOLRAY.CO.UK E-MAIL: SALES@SOLRAY.CO.UK