

Technical Data Sheet




Radiant Heating & Cooling Panels

Solray Perimeter ND95120

950mm - 1200mm Wide

Surface Mounted, Aluminium Faceplate

Data Sheet 2-5

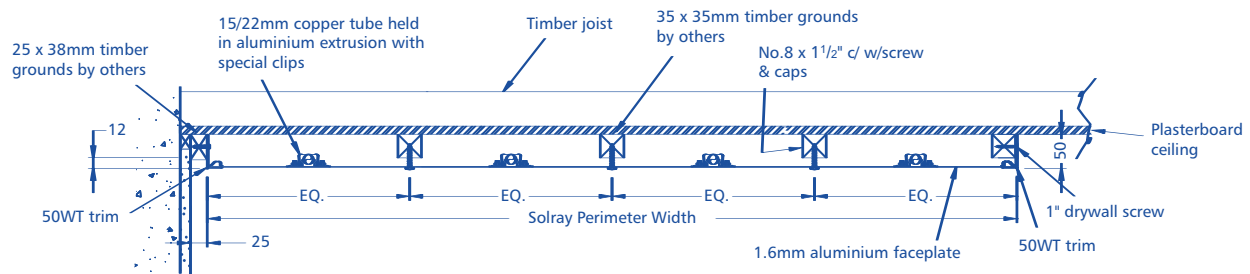

Typical Section Detail

NOTES

Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour.

Panels insulated with 50mm glass fibre class 'o' backed mattress.

Wall trims mill finished for final painting on site by others, fixed with No.7 x 1 1/4" countersunk wood screws. Connections to be 75mm long copper tails.

Timber grounds by others to be level, straight & securely fixed.

Perimeter face fixed with No. 8 wood screws and caps. Mass of 1200mm Solray Perimeter is 14.2kg/m.

COMYN CHING & CO. (SOLRAY) LTD

SOLRAY WORKS, MANILLA STREET, DOCKLANDS, LONDON E14 8LG

TEL: 020 7987 8787 FAX: 020 7987 9898

WWW.SOLRAY.CO.UK E-MAIL: SALES@SOLRAY.CO.UK