

Technical Data Sheet


Solray Linear Trident

SLT6590 650mm - 900mm Wide



Ceiling Mounted, Aluminium Faceplate

Data Sheet 3-4

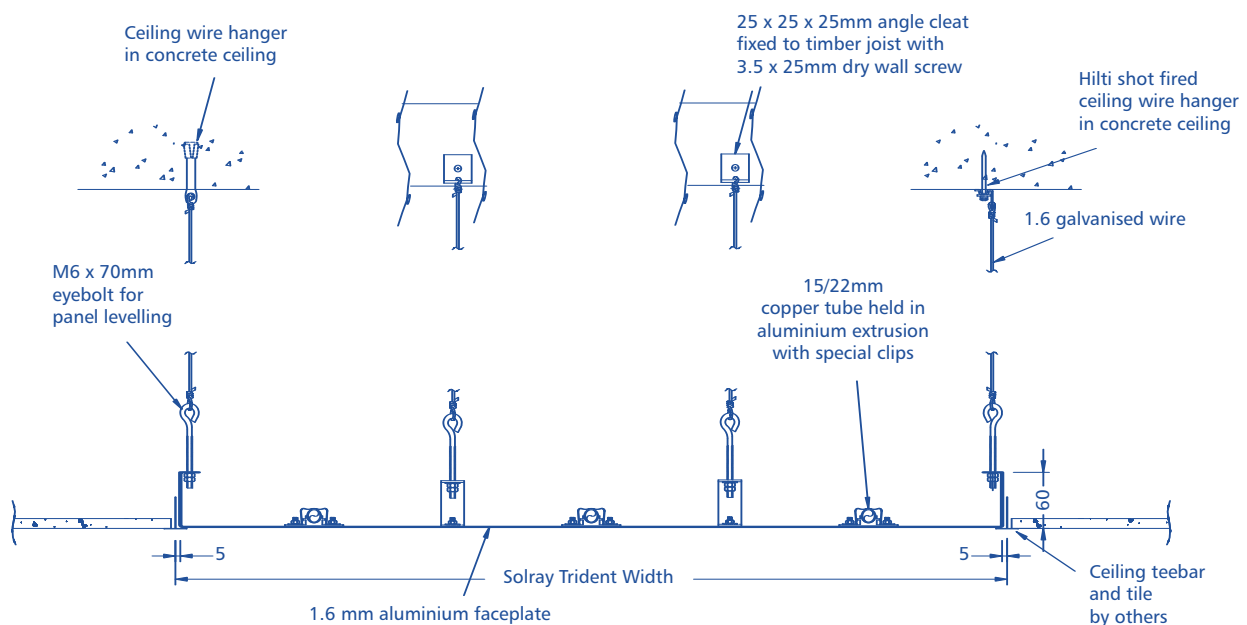

Typical Section Detail

NOTES

Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour.
Panels insulated with 50mm glass fibre class 'o' backed mattress.
Edges returned 60mm and 20mm.
Connections to be 75mm long copper tails.
Ceiling grid to be installed prior to panels.
Mass of 700mm Solray Trident is 9.8kg/m.

COMYN CHING & CO. (SOLRAY) LTD

SOLRAY WORKS, MANILLA STREET, DOCKLANDS, LONDON E14 8LG

TEL: 020 7987 8787 FAX: 020 7987 9898

WWW.SOLRAY.CO.UK E-MAIL: SALES@SOLRAY.CO.UK