
Technical Data Sheet




Solray Linear Trident SFH3560 350mm - 600mm Wide

Free Hanging, Aluminium Faceplate

Data Sheet 4-2

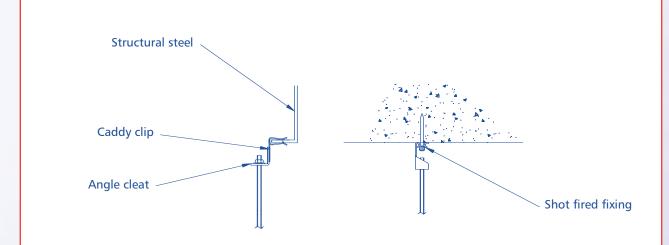

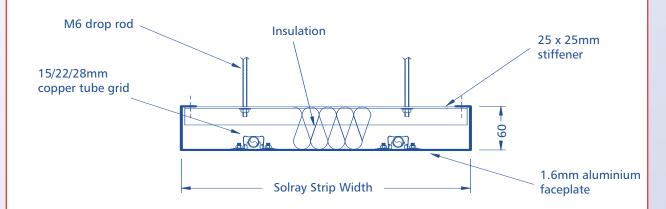

Typical Section Detail

NOTES

Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour. Panels insulated with 50mm glass fibre class 'o' backed mattress.

Connections to be 75mm long copper tails.

Mass of 400mm Solray Strip is 6kg/m.

TEL: 020 7987 8787 FAX: 020 7987 9898 WWW.SOLRAY.CO.UK E-MAIL: SALES@SOLRAY.CO.UK