


Technical Data Sheet




Solray Wall Panel 4RWST:S 4 Returned Edges

Wall Mounted, Steel Faceplate

Data Sheet 6-8

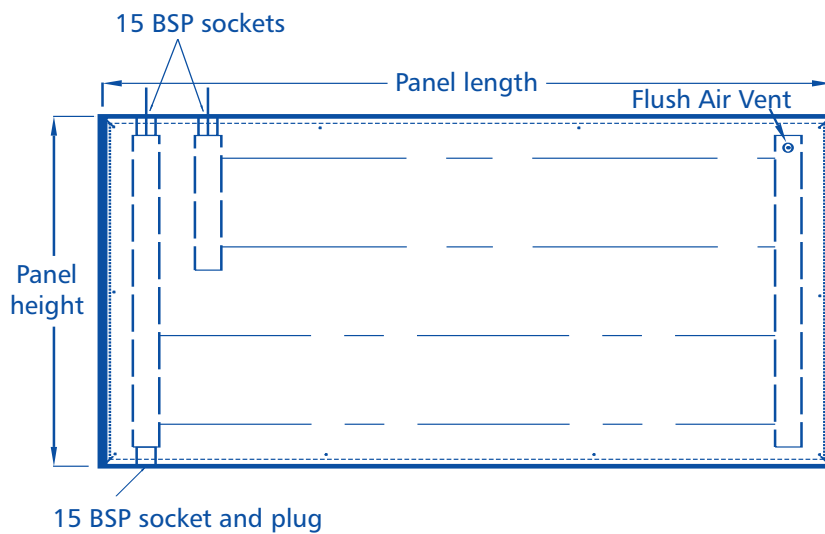

Front Elevation

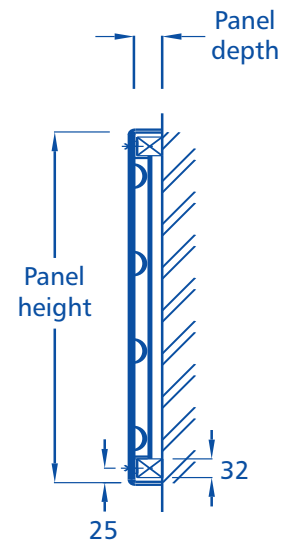

Section

NOTES

- All panels are constructed from 2mm mild steel.
- Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour.
- Timber grounds by others.
- Panels insulated with 50mm glass fibre class 'o' backed mattress.
- Panels drilled at approximately 600mm centres along returned edge for fixing with No.7 countersunk wood screws.
- Connections are 15mm, 20mm or 25mm BSP sockets level with panel edge.
- All edges returned.
- Mitred joints between rolled edges can be rounded bull nose if required.
- Timber grounds notched at headers.
- Panels tested to 700 kPa at works.
- Panel mass is approximately 40kg/m².

COMYN CHING & CO. (SOLRAY) LTD

SOLRAY WORKS, MANILLA STREET, DOCKLANDS, LONDON E14 8LG

TEL: 020 7987 8787 FAX: 020 7987 9898

WWW.SOLRAY.CO.UK E-MAIL: SALES@SOLRAY.CO.UK