

Technical data sheet




Solray ceiling panel 4RC1C

4 Returned edges

Standard security, steel faced

Data sheet 7-1

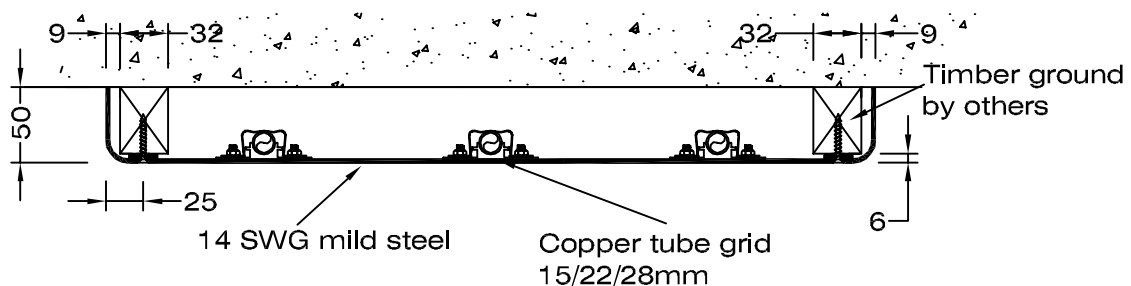

Scale 1:5

Notes:

Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour.

Timber grounds by others.

Panels insulated with 50mm glass fibre class 'b' backed mattress.

Panels fixed at 300mm centres using No. 7 countersunk security screws.

Connections are 15mm, 20mm or 25mm BSP sockets.

All edges are rolled

Panel mass is approximately 40kg/m².

Panels tested to 700kPa at works.

Panels can be powder coated to any standard RAL colour on request.

COMYN CHING & CO. (SOLRAY) LTD

PHEONIX WAY, GARNGOCH INDUSTRIAL ESTATE,
GORSEINON, SWANSEA, SA4 9WF

TEL:01792 89 22 11 FAX:01792 89 88 55 WWW.SOLRAY.CO.UK

E-MAIL: SALES@SOLRAY.CO.UK